

GOLF TROLLEY SERIES



REVOLITHIUM
INDUSTRIAL BATTERY

RLGT12-16

12.8V - 16AH

205WH



TECHNICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	16 AH
Energy	205 WH
Dimensions (L x W x H)	168 x 128 x 75 mm
Weight	2.1Kg
Terminal Type	Anderson
Case Material	ABS
Recommended Charge Current	4 A
Maximum Continuous Discharge Current	25 A

RLGT12-20

12.8V - 18AH

230WH



TECHNICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	18 AH
Energy	230 WH
Dimensions (L x W x H)	168 x 128 x 75 mm
Weight	2.2Kg
Terminal Type	Anderson
Case Material	ABS
Recommended Charge Current	4 A
Maximum Continuous Discharge Current	25 A

RLGT12-24

12.8V - 24AH

307WH



TECHNICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	24 AH
Energy	307 WH
Dimensions (L x W x H)	168 x 128 x 101 mm
Weight	2.8Kg
Terminal Type	Anderson
Case Material	ABS
Recommended Charge Current	5 A
Maximum Continuous Discharge Current	25 A




IBS Italia - Industrial Battery Service Italia S.r.l.

Via E. Caviglia 3 - 20139 MILANO (MI) - ITALY

e-mail: assistenza@ibsbatterie.it - commerciale@ibsbatterie.it

Tel. (+39) 02 21.11.69.68



GOLF TROLLEY SERIES




REVOLITHIUM
INDUSTRIAL BATTERY

CHARGER SPECIFICATIONS


AC Input	AC 100 - 240 V, 50 / 60 Hz, 1 A
DC Output	Standard: 14.4 V - 4 A (Charge current optional: 4 - 15A)

PERFORMANCE CURVE


Different Rate Discharge Curve @25°C

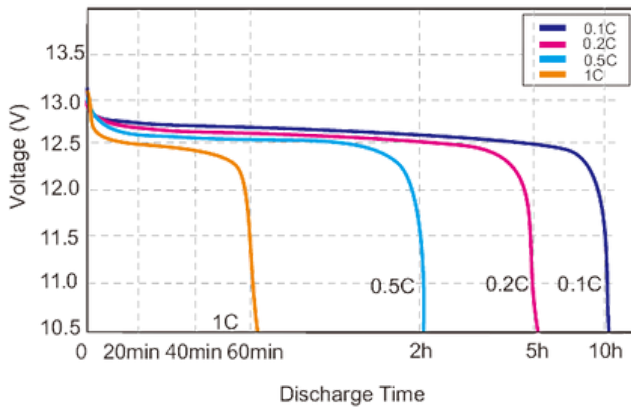


Different Temperature Discharge Curve @0.5°C

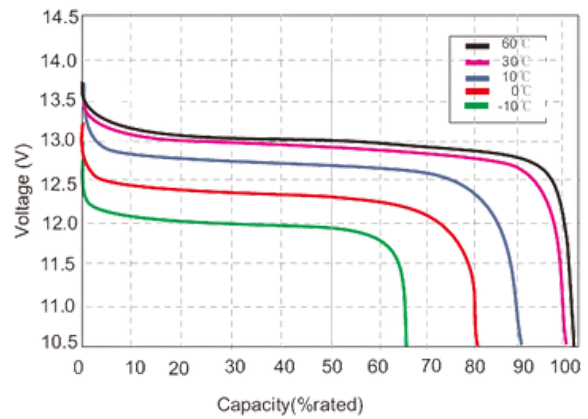

Different DOD Discharge and Different Temperature Cycle Life Curve @0.2C 25C

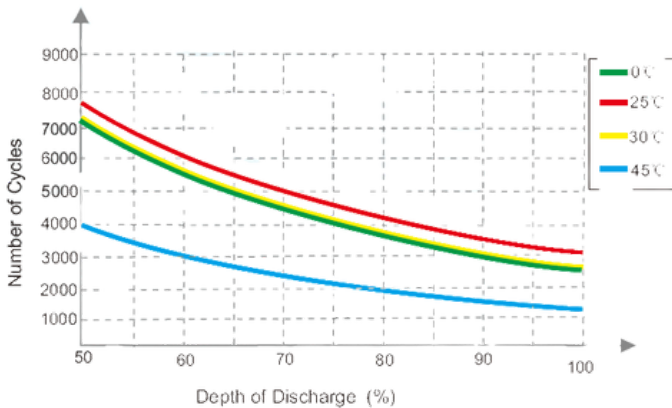

Different Temperature Self Discharge Curve

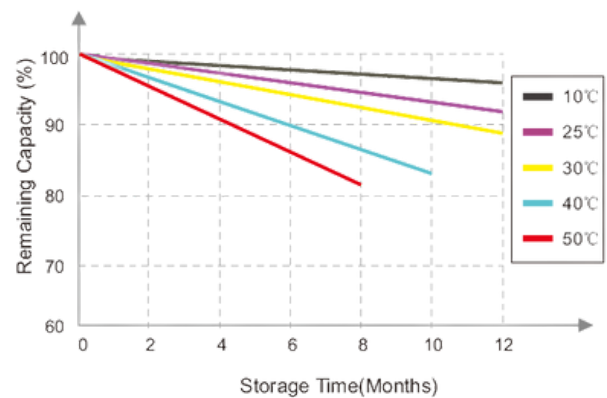

IBS Italia - Industrial Battery Service Italia S.r.l.

Via E. Cavaglia 3 - 20139 MILANO (MI) - ITALY

e-mail: assistenza@ibsbatterie.it - commerciale@ibsbatterie.it

Tel. (+39) 02 21.11.69.68